


Features:

- Rated Current up to 30A
- Filters offer an optimized filter range for high performance AC & DC applications.
- High Conducted attenuation performance
- Various terminal options allow you to select the desired pulse connection style.
- Designed for easy and fast chassis mounting.

Applications:


- Power Systems
- Consumer goods
- Electronic Equipment
- Medical equipment
- Frequency convertors
- Electronic data processing equipment
- UPS/Inverters

DATA SHEET
SINGLE PHASE EMI FILTER - SMF2132
Description




These series of filters designed for motor and power drive systems which can provide superior attenuation performance and suppress conducted noise even when high interference level are present.

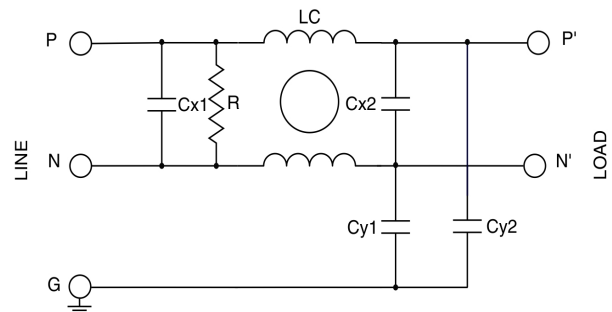


Technical Specifications:




Maximum continuous operating voltage	:	250 VAC,50/60Hz, 250 VDC
Operating Frequency	:	DC to 400Hz
Current ratings	:	1A to 30A @40°C
High Potential test voltage	:	P to N 1075VDCfor 2 Sec P to G 2250VDC for 2 Sec P to G 1500VAC for 2 Sec (M Types)
Overload Capability	:	4 x rated current at switch on 1.5x rated current for 1 minute, once per hour
Design Corresponding to	:	UL 60939-3 and IEC 60939-1&2
Flammability corresponding to	:	UL 94 V-0 or better
Temperature range	:	-25°C to +100°C
Climatic Category	:	25/100/21
Protection category	:	IP20



Typical Circuit Diagram:


Ordering information:

STANDARD VERSION								
Model Number	Part Number	Current Rating @ 40°C (A)	Leakage current @ 250 VAC/50 Hz (mA)	Power loss @25°C / 50Hz (W)	Termination			Weight Approx. (g)
								
SMF2132-1-4	E108130-1	1	0.173	1	-4	-	-	70
SMF2132-1-5	E108130-2	1	0.173	1	-	-5	-	70
SMF2132-3-4	E108131-1	3	0.26	2.5	-4	-	-	110
SMF2132-3-5	E108131-2	3	0.26	2.5	-	-5	-	110
SMF2132-4-4	E108132-1	4	0.26	3	-4	-	-	120
SMF2132-4-5	E108132-2	4	0.26	3	-	-5	-	120
SMF2132-6-4	E108133-1	6	0.37	3.5	-4	-	-	120
SMF2132-6-5	E108133-2	6	0.37	3.5	-	-5	-	120
SMF2132-8-4	E108134-1	8	0.37	4	-4	-	-	200
SMF2132-8-5	E108134-2	8	0.37	4	-	-5	-	200
SMF2132-10-4	E108135-1	10	0.37	5.5	-4	-	-	200
SMF2132-10-5	E108135-2	10	0.37	5.5	-	-5	-	200
SMF2132-12-4	E108136-1	12	0.8	8	-4	-	-	270
SMF2132-12-5	E108136-2	12	0.8	8	-	-5	-	270
SMF2132-16-4	E108137-1	16	0.8	6.5	-4	-	-	270
SMF2132-16-5	E108137-2	16	0.8	6.5	-	-5	-	270
SMF2132-16-1	E108137-3	16	0.8	6.5	-	-	-1	270
SMF2132-20-4	E108138-1	20	0.8	5	-4	-	-	330
SMF2132-20-1	E108138-2	20	0.8	5	-	-	-1	330
SMF2132-30-1	E108139-1	30	0.8	6	-	-	-1	350

SAFETY VERSION								
Model Number	Part Number	Current Rating @ 40°C (A)	Leakage current @ 250 VAC/50 Hz (mA)	Power loss @25°C / 50Hz (W)	Termination			Weight Approx. (g)
								
SMF2132S-1-4	E108140-1	1	0.05	1	-4	-	-	70
SMF2132S-1-5	E108140-2	1	0.05	1	-	-5	-	70
SMF2132S-3-4	E108141-1	3	0.05	2.5	-4	-	-	110
SMF2132S-3-5	E108141-2	3	0.05	2.5	-	-5	-	110
SMF2132S-4-4	E108142-1	4	0.05	3	-4	-	-	120
SMF2132S-4-5	E108142-2	4	0.05	3	-	-5	-	120
SMF2132S-6-4	E108143-1	6	0.05	3.5	-4	-	-	120
SMF2132S-6-5	E108143-2	6	0.05	3.5	-	-5	-	120
SMF2132S-8-4	E108144-1	8	0.05	4	-4	-	-	200
SMF2132S-8-5	E108144-2	8	0.05	4	-	-5	-	200
SMF2132S-10-4	E108145-1	10	0.05	5.5	-4	-	-	200
SMF2132S-10-5	E108145-2	10	0.05	5.5	-	-5	-	200
SMF2132S-12-4	E108146-1	12	0.05	8	-4	-	-	270
SMF2132S-12-5	E108146-2	12	0.05	8	-	-5	-	270
SMF2132S-16-4	E108148-1	16	0.05	6.5	-4	-	-	270
SMF2132S-16-5	E108148-2	16	0.05	6.5	-	-5	-	270
SMF2132S-16-1	E108148-3	16	0.05	6.5	-	-	-1	270
SMF2132S-20-4	E108149-1	20	0.05	5	-4	-	-	330
SMF2132S-20-1	E108149-2	20	0.05	5	-	-	-1	330
SMF2132S-30-1	E108150-1	30	0.05	6	-	-	-1	350

MEDICAL VERSION								
Model Number	Part Number	Current Rating @ 40°C (A)	Leakage current @ 250 VAC/50 Hz (mA)	Power loss @25°C / 50Hz (W)	Termination			Weight Approx. (g)
								
SMF2132M-1-4	E108160-1	1	0	1	-4	-	-	70
SMF2132M-1-5	E108160-2	1	0	1	-	-5	-	70
SMF2132M-3-4	E108161-1	3	0	2.5	-4	-	-	110
SMF2132M-3-5	E108161-2	3	0	2.5	-	-5	-	110
SMF2132M-4-4	E108162-1	4	0	3	-4	-	-	120
SMF2132M-4-5	E108162-2	4	0	3	-	-5	-	120
SMF2132M-6-4	E108163-1	6	0	3.5	-4	-	-	120
SMF2132M-6-5	E108163-2	6	0	3.5	-	-5	-	120
SMF2132M-8-4	E108164-1	8	0	4	-4	-	-	200
SMF2132M-8-5	E108164-2	8	0	4	-	-5	-	200
SMF2132M-10-4	E108165-1	10	0	5.5	-4	-	-	200
SMF2132M-10-5	E108165-2	10	0	5.5	-	-5	-	200
SMF2132M-12-4	E108166-1	12	0	8	-4	-	-	270
SMF2132M-12-5	E108166-2	12	0	8	-	-5	-	270
SMF2132M-16-4	E108167-1	16	0	6.5	-4	-	-	270
SMF2132M-16-5	E108167-2	16	0	6.5	-	-5	-	270
SMF2132M-16-1	E108167-3	16	0	6.5	-	-	-1	270
SMF2132M-20-4	E108168-1	20	0	5	-4	-	-	330
SMF2132M-20-1	E108168-2	20	0	5	-	-	-1	330
SMF2132M-30-1	E108169-1	30	0	6	-	-	-1	350


ENHANCED VERSION							
Model Number	Part Number	Current Rating @ 40°C (A)	Leakage current @ 250 VAC/50 Hz (mA)	Power loss @25°C / 50Hz (W)	Termination		Weight Approx. (g)
							
SMF2132N-1-4	E108170-1	1	5.35	1	-4	-	70
SMF2132N-3-4	E108171-1	3	3.69	2.5	-4	-	110
SMF2132N-4-4	E108172-1	4	3.69	3	-4	-	120
SMF2132N-6-4	E108173-1	6	3.69	3.5	-4	-	120
SMF2132N-8-4	E108174-1	8	5.35	4	-4	-	200
SMF2132N-10-4	E108175-1	10	5.35	5.5	-4	-	200
SMF2132N-12-4	E108176-1	12	5.35	8	-4	-	270
SMF2132N-16-4	E108177-1	16	3.69	6.5	-4	-	270
SMF2132N-16-1	E108177-2	16	3.69	6.5	-	-1	270
SMF2132N-20-4	E108178-1	20	3.69	5	-4	-	330
SMF2132N-20-1	E108178-2	20	3.69	5	-	-1	330
SMF2132N-30-1	E108179-1	30	3.69	6	-	-1	350

Note : Maximum leakage current is according to IEC 60939-3 under normal AC operating conditions. The worst leakage current could double the value if the neutral is interrupted.


Insertion Loss : Common mode _____ Differential Mode

Per CISPR 17; C=50 Ω/50 Ω D=50 Ω/50 Ω


1A Standard Version

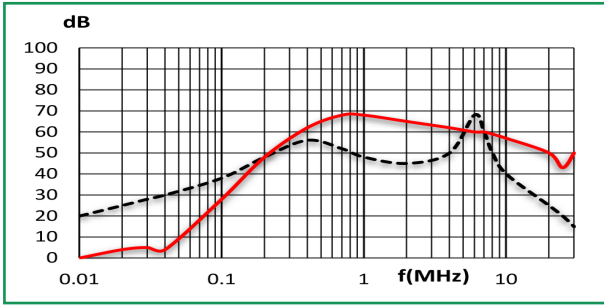


Safety Version

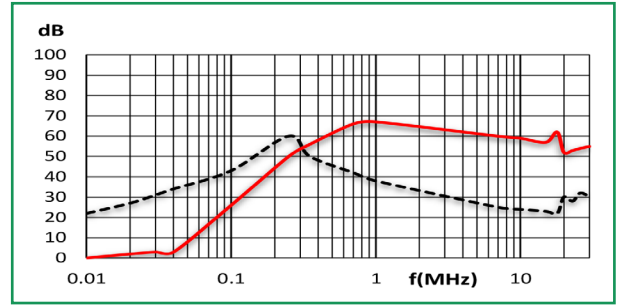


Medical Version

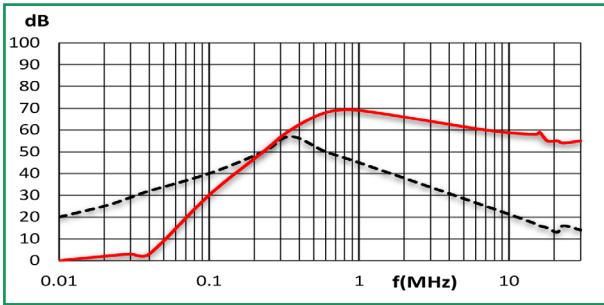


Enhanced Performance

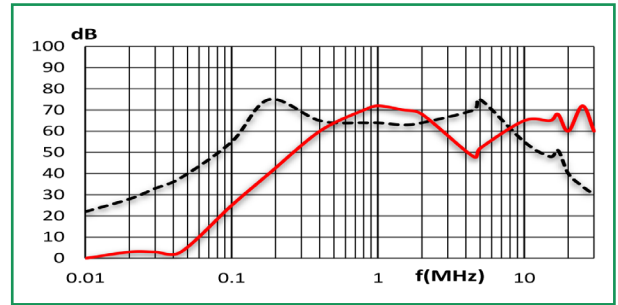


3A Standard Version

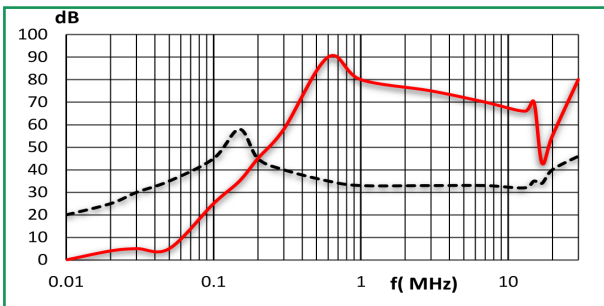


Safety Version

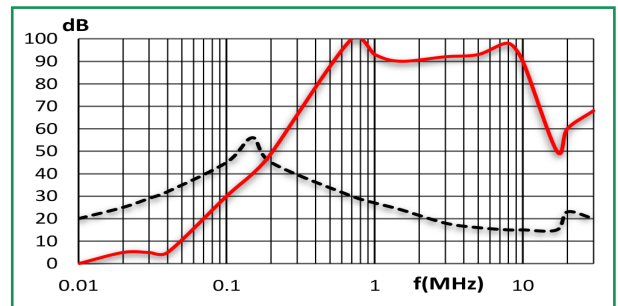


Medical Version

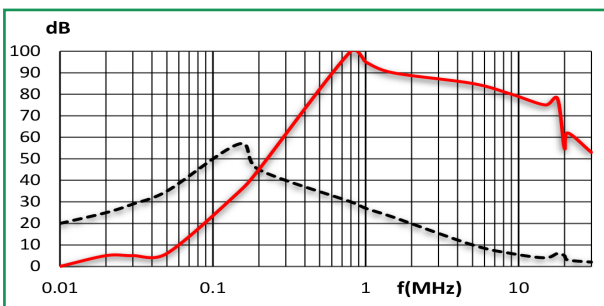


Enhanced Performance

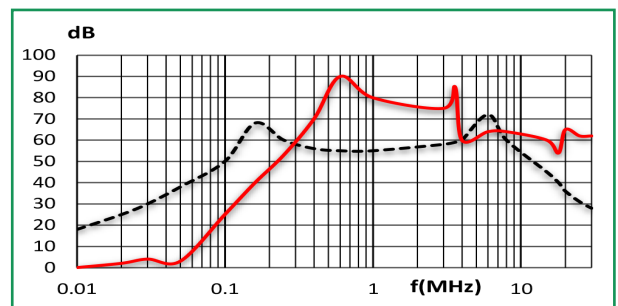


4A Standard Version

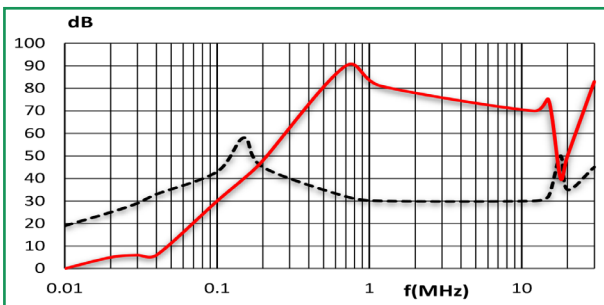


Safety Version

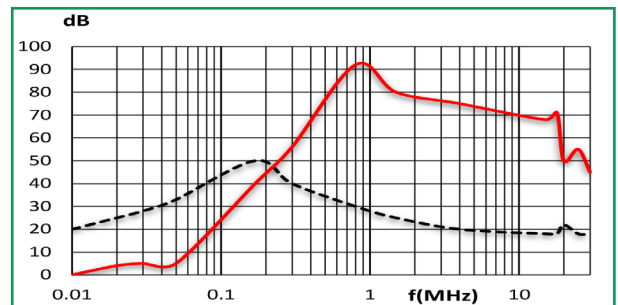


Medical Version

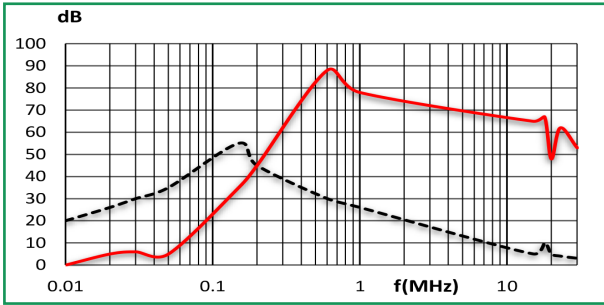


Enhanced Performance

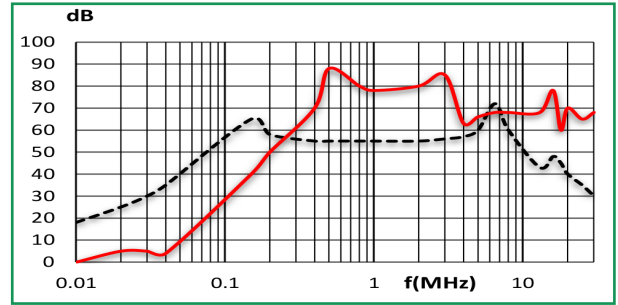


6A Standard Version

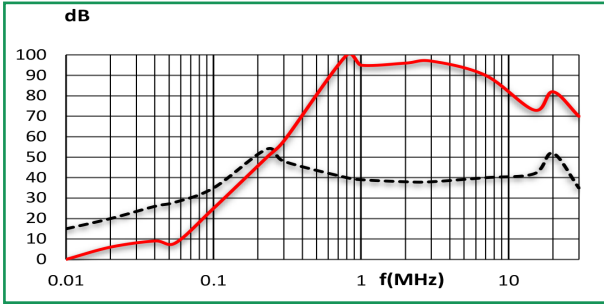


Safety Version

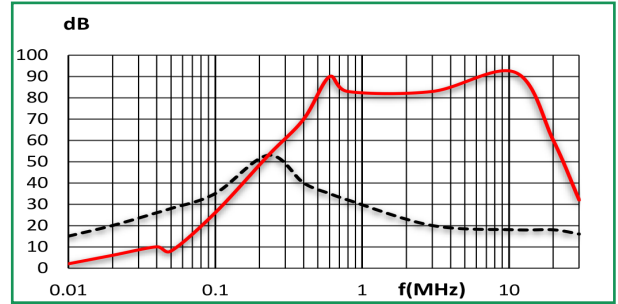


Medical Version

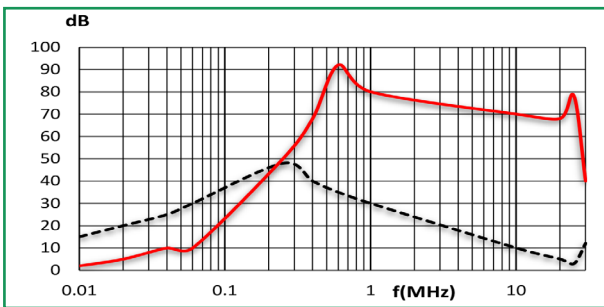


Enhanced Performance

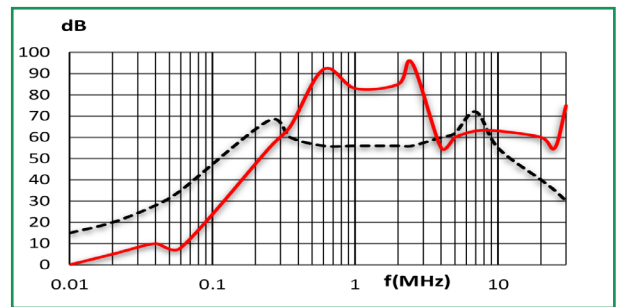


8A Standard Version

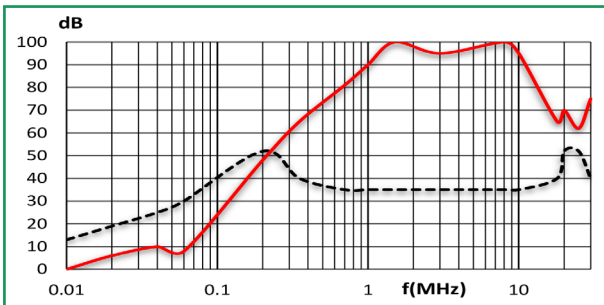


Safety Version

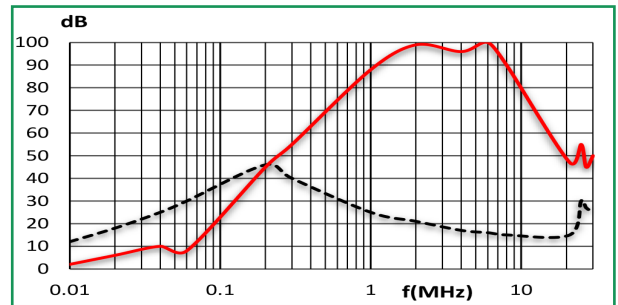

Medical Version

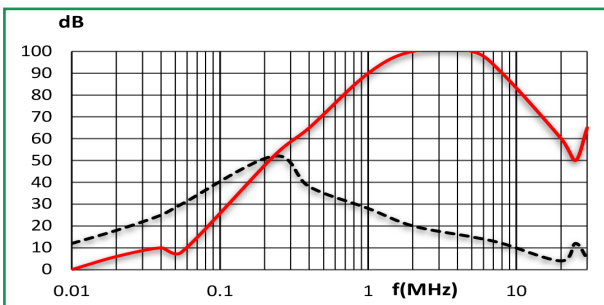


Enhanced Performance

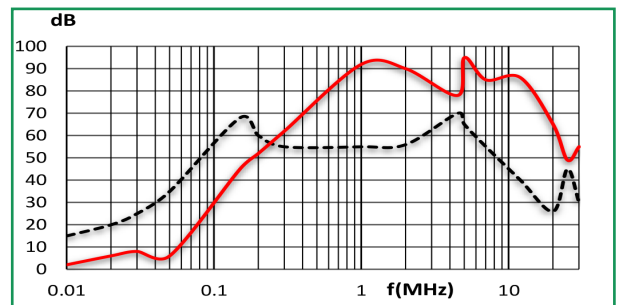


10A


Standard Version

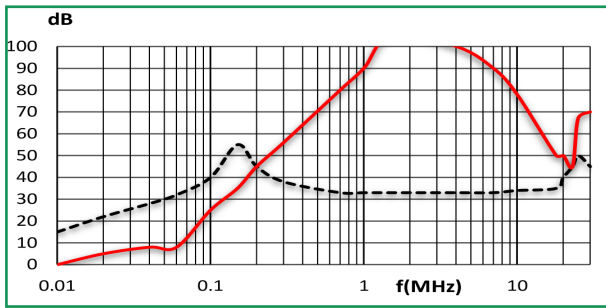


Safety Version

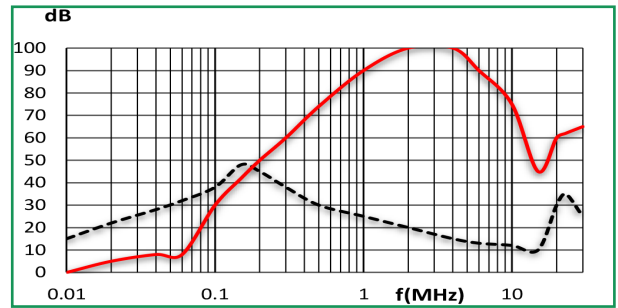

Medical Version

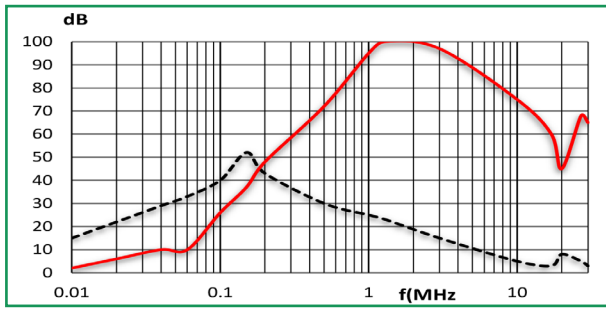


Enhanced Performance

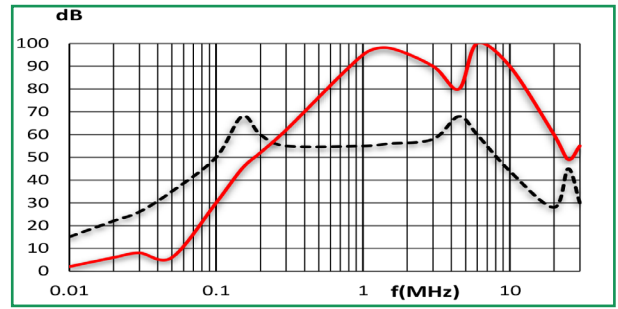


12A


Standard Version

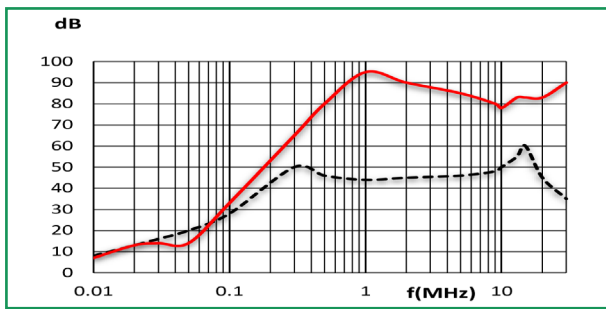


Safety Version

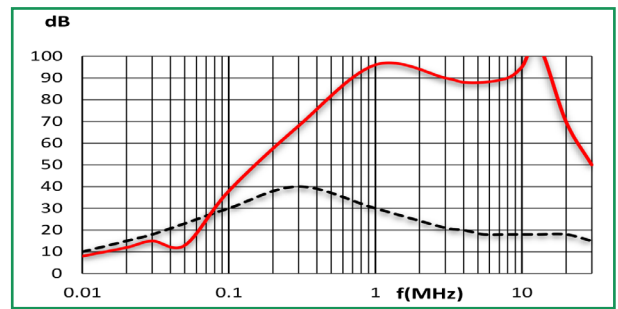

Medical Version

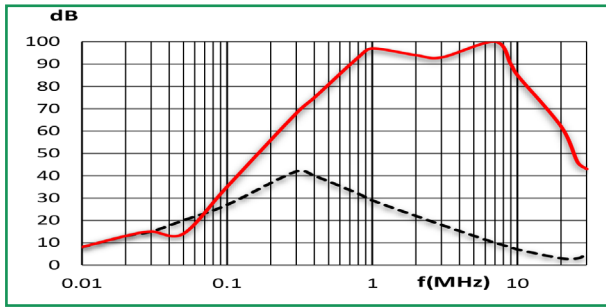


Enhanced Performance

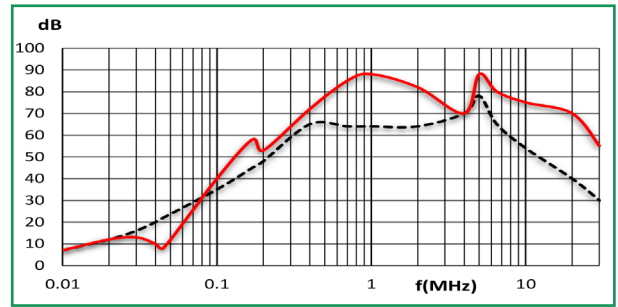


16A


Standard Version

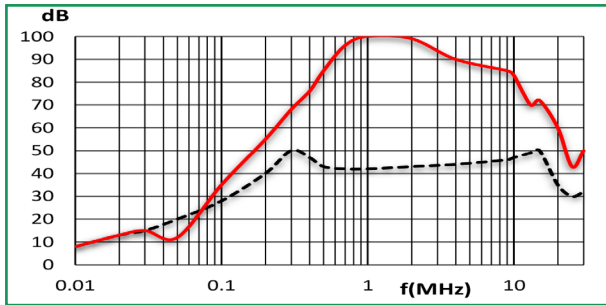


Safety Version

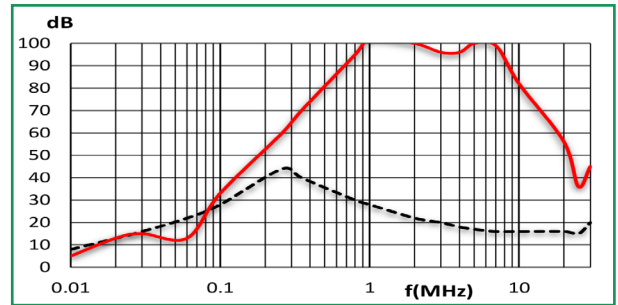

Medical Version

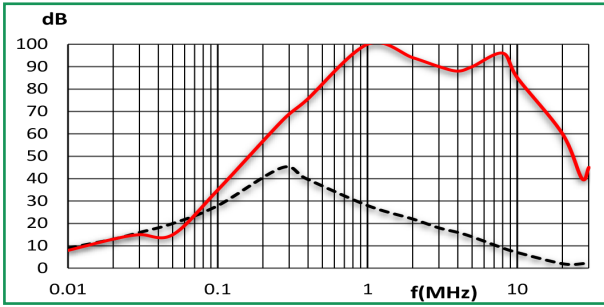


Enhanced Performance

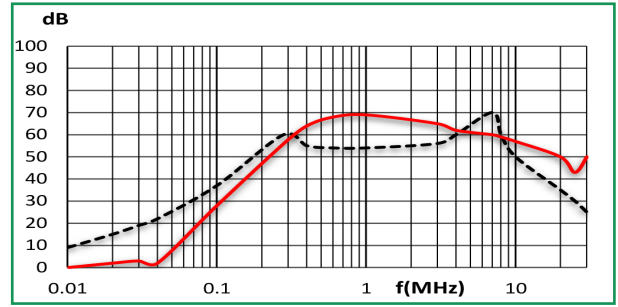


20A


Standard Version

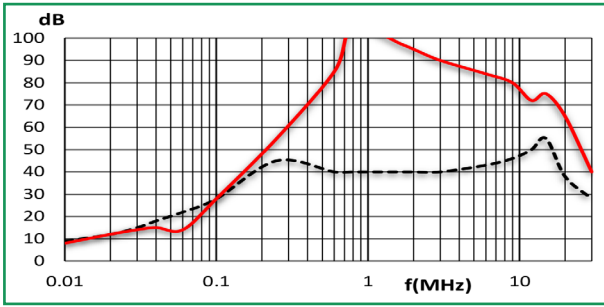


Safety Version

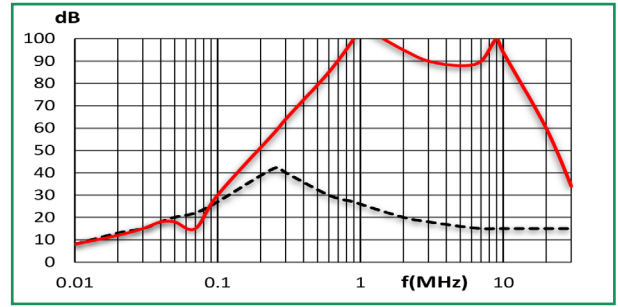

Medical Version

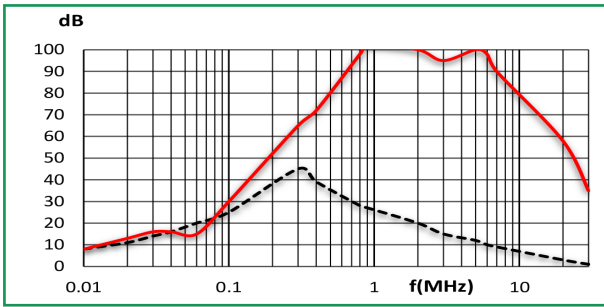


Enhanced Performance

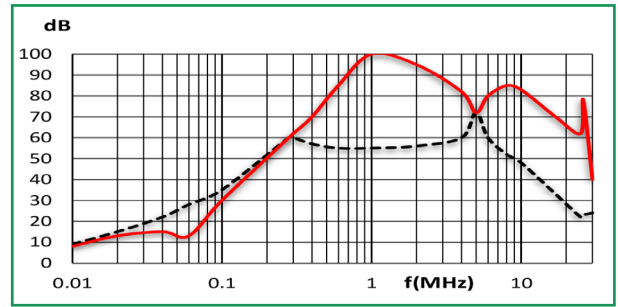


30A


Standard Version

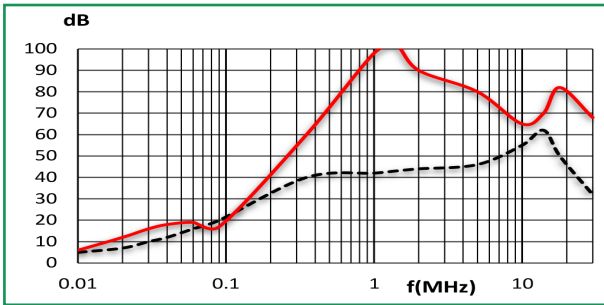


Safety Version

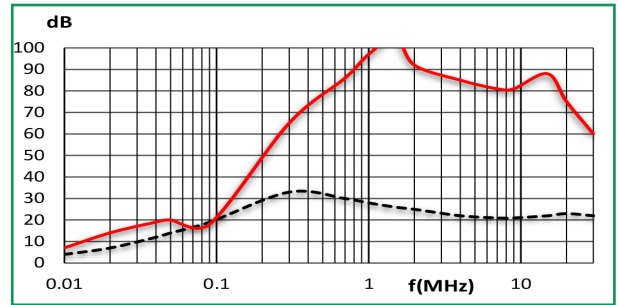


Medical Version

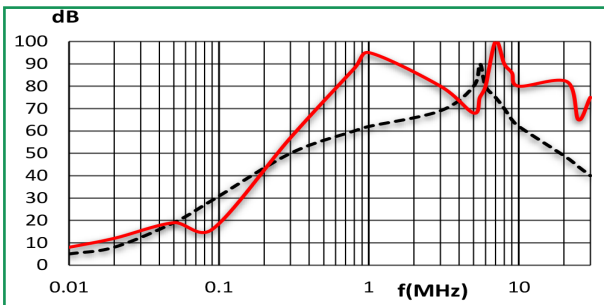


Enhanced Performance

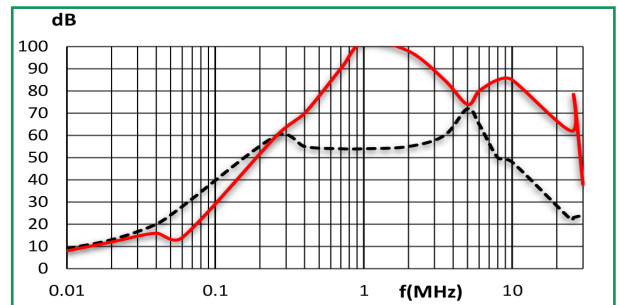


Mechanical Drawing:

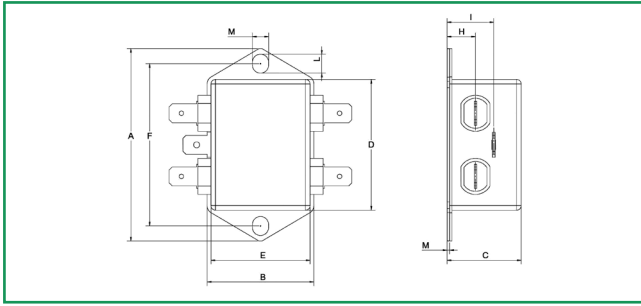


Connection style -04, 1A types

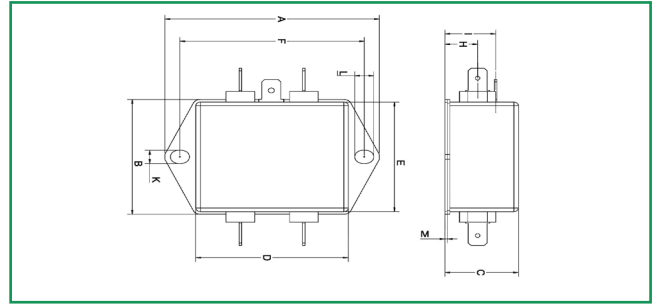


Connection style -04, 3A to 6A types

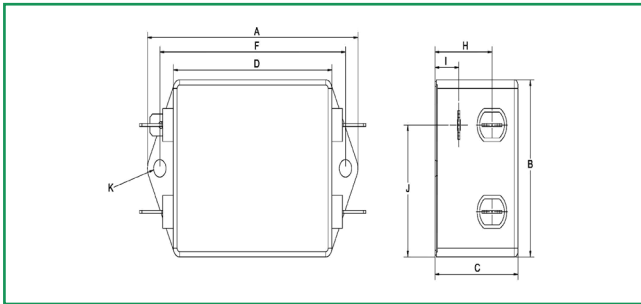


Connection style -04, 8A to 12A types

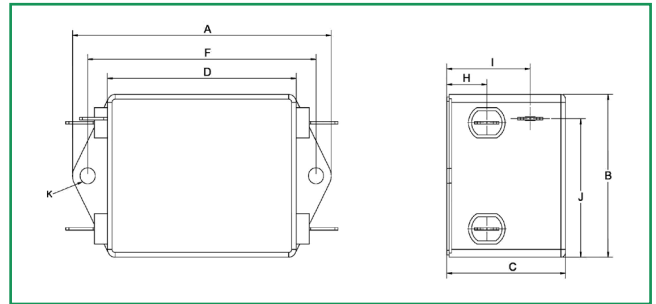


Connection style -04, 16A to 30A types

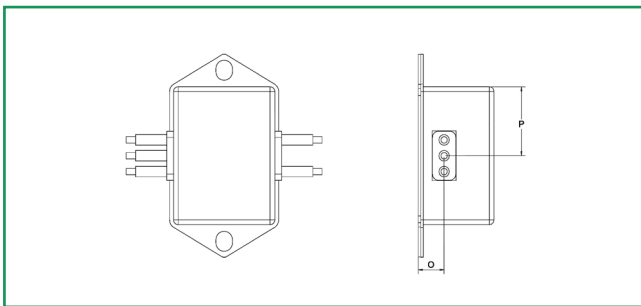

**Connection style -05, 1A to 6A types
(same dimensions as style -04)**

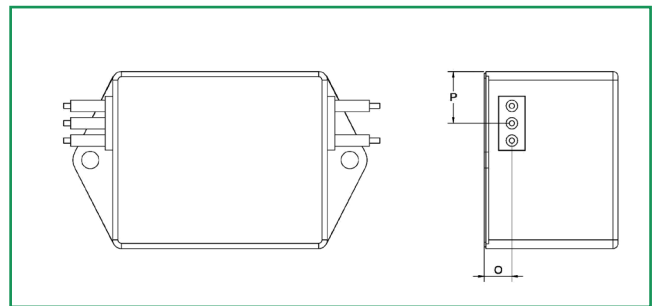

**Connection style -05, 8A to 16A types
(same dimensions as style -04)**

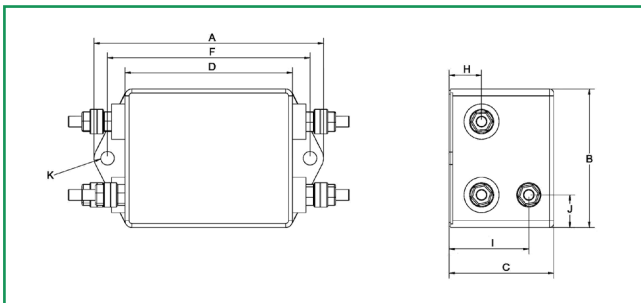

Connection style -01 16A to 30 A types

Mechanical dimensions:

	1A	3A	4A	6A	8A	10A	12A	16A	20A	30A
A	64±1	71±1	71±1	71±1	85±1	85±1	85±1	85±1	85±1	85±1
B	35±1	46.6±1	46.6±1	46.6±1	51±1	51±1	51±1	51±1	51±1	51±1
C	24.3±1	22.3±1	22.3±1	22.3±1	32.5±1	32.5±1	32.5±1	39±1	39±1	39±1
D	43.5±1	50.5±1	50.5±1	50.5±1	64±1	64±1	64±1	62±1	62±1	62±1
E	32.5	44.5	44.5	44.5	-	-	-	-	-	-
F	54	61	61	61	75	75	75	75	75	75
H	9.3	10.8	10.8	10.8	21.5	21.5	21.5	13	13	13
I	15.3	16.8	16.8	16.8	9	9	9	27.5	27.5	27.5
K	5.3	5.3	5.3	5.3	5	5	5	5	5	5
L	6.3	6.3	6.3	6.3	-	-	-	-	-	-
M	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8
Connection Style-04	-	-	-	-	-	-	-	-	-	-
N	6.3x0.8	6.3X0.8	6.3X0.8	6.3X0.8	6.3X0.8	6.3X0.8	6.3X0.8	6.3X0.8	6.3X0.8	
Connection Style-05	-	-	-	-	-	-	-	-	-	-
O	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	-	-
P	21.8	14	14	14	14.9	14.9	14.9	14.9	-	-
AWG Type Wire	AWG 20	AWG 20	AWG 20	AWG 18	AWG 18	AWG 18	AWG 16	AWG 16	-	-
Wire Length	140	140	140	140	140	140	140	140	-	-
Connection Style-01	-	-	-	-	-	-	-	-	-	-
N	-	-	-	-	-	-	-	M4	M4	M4
Recommended torque (Nm)	-	-	-	-	-	-	-	1.2-1.3	1.2-1.3	1.2-1.3
Earth terminal Recommended torque (Nm)	-	-	-	-	-	-	-	1.5-1.7	1.5-1.7	1.5-1.7

All dimensions in mm;Tolerance according: ISO 2768-c